

DM72-RM-04-PN-4-44-11A(H) DM72-RM-08-PN-4-44-11A(H)
DM72-RM-12-PN-4-44-11A(H) DM72-RM-16-PN-4-44-11A(H)
DM72-RM-20-PN-4-44-11A(H)


特点

- 本模組提供4、8、12、16、20位獨立继电器回路。
- 适用于NPN, PNP型控制器。
- 继电器采用2C/O节点, 输出端一对一输出。
- 节省配线空间, 时间和成本。
- 方便检修和维护。

Features


- Including 4, 8, 12, 16, 20 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 2C/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



型号 P/N	长L * 宽W * 高H mm
DM72-RM-04-PN-4-44-11A(H)	72 * 90 * 70
DM72-RM-08-PN-4-44-11A(H)	133 * 90 * 70
DM72-RM-12-PN-4-44-11A(H)	198 * 90 * 70
DM72-RM-16-PN-4-44-11A(H)	258 * 90 * 70
DM72-RM-20-PN-4-44-11A(H)	319 * 90 * 70

电路图 Circuit Diagram

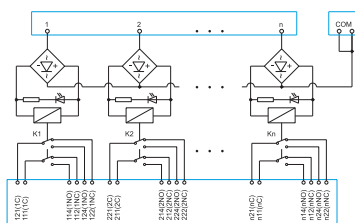


DM72-RM-04-PN-4-44-11A(H) DM72-RM-08-PN-4-44-11A(H)
DM72-RM-12-PN-4-44-11A(H) DM72-RM-16-PN-4-44-11A(H)
DM72-RM-20-PN-4-44-11A(H)

欧姆龙继电器P/N: G2R-2 24VDC, 继电器为消耗品, 若寿命用尽可用同规格继电器更换。
Omron relay P/N: G2R-2 24VDC, the relay is consumable, if the service life of the same specification relay replacement.

- ◎ 使用前请确认输出接点容量，请勿超出其范围。

接线方式 Wiring Method

- 通过端子台一对一接线输入控制信号。
- 控制信号为NPN时(低信号输入)，COM端接24V。
- 控制信号为PNP时(高信号输入)，COM端接0V。
- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

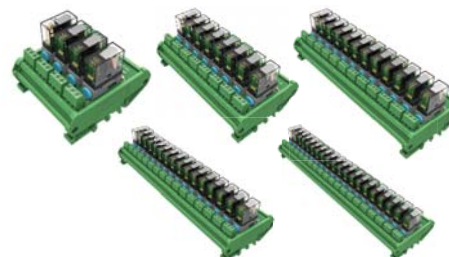

DM72-RM-04-PN-2-44-101A(H) DM72-RM-08-PN-2-44-101A(H)
DM72-RM-12-PN-2-44-101A(H) DM72-RM-16-PN-2-44-101A(H)
DM72-RM-20-PN-2-44-101A(H)


特点

- 本模組提供4、8、12、16、20位獨立繼電器回路。
- 適用於NPN、PNP型控制器。
- 繼電器採用1C/O節點，輸出端一對一輸出。
- 節省配線空間，時間和成本。
- 方便查修和維護。

Features


- Including 4, 8, 12, 16, 20 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1C/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



型号 P/N	长 L * 宽 W * 高 H mm
DM72-RM-04-PN-2-44-101A(H)	81.5 * 90 * 70
DM72-RM-08-PN-2-44-101A(H)	156 * 90 * 70
DM72-RM-12-PN-2-44-101A(H)	230 * 90 * 70
DM72-RM-16-PN-2-44-101A(H)	305 * 90 * 70
DM72-RM-20-PN-2-44-101A(H)	380 * 90 * 70

电路图 Circuit Diagram

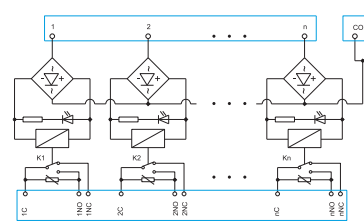

DM72-RM-04-PN-2-44-101A(H) DM72-RM-08-PN-2-44-101A(H)
DM72-RM-12-PN-2-44-101A(H) DM72-RM-16-PN-2-44-101A(H)
DM72-RM-20-PN-2-44-101A(H)


欧姆龙继电器P/N: G2R-1-E 24VDC, 继电器为消耗品, 若寿命用尽可用同规格继电器更换。
Omron relay P/N: G2R-1-E 24VDC, the relay is consumable, if the service life of the same specification relay replacement.

- ◎ 使用前请确认输出接点容量，请勿超出其范围。
◎ Please confirm the output contact capacity before use, do not exceed its scope.

接线方式 Wiring Method

- 通过端子台一对一接线输入控制信号。
- 控制信号为NPN(对低信号输入)，COM接24V。
- 控制信号为PNP(对高信号输入)，COM接0V。
- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

普通继电器模组 Relay Module

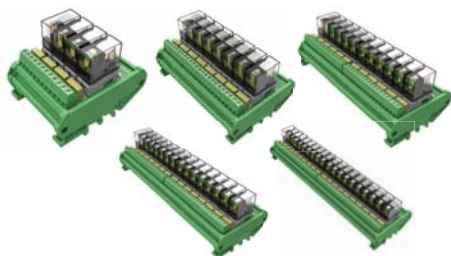DM72-RM-04-PN-2-44-11A(H) DM72-RM-08-PN-2-44-11A(H)
DM72-RM-12-PN-2-44-11A(H) DM72-RM-16-PN-2-44-11A(H)
DM72-RM-20-PN-2-44-11A(H)


特点

- 本模组提供4、8、12、16、20位独立继电器回路。
- 适用于NPN，PNP型控制器。
- 继电器采用1C/O节点，输出端一对一输出。
- 节省配线空间，时间和成本。
- 方便查修和维护。

Features


- Including 4, 8, 12, 16, 20 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1C/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



型号 P/N	长L * 宽W * 高H mm
DM72-RM-04-PN-2-44-11A(H)	70 * 90 * 70
DM72-RM-08-PN-2-44-11A(H)	131 * 90 * 70
DM72-RM-12-PN-2-44-11A(H)	194 * 90 * 70
DM72-RM-16-PN-2-44-11A(H)	255 * 90 * 70
DM72-RM-20-PN-2-44-11A(H)	316 * 90 * 70

电路图 Circuit Diagram

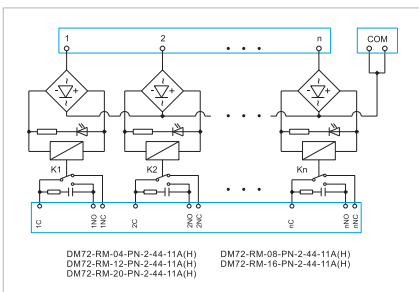

性能参数 Performance Parameters

耐电压 Withstand Voltage	500VAC 50Hz (1min)
绝缘阻抗 Insulation Resistance	1000MΩ/500VDC
线圈电压 Coil Voltage	24VDC
负载电压 Load Voltage	30VDC/240VAC
负载电流 Load Current	10A
负载类型 Load Type	1NO + 1NC
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	TS-15 TS-32 TS-35

继电器型号 Relay P/N


欧姆龙继电器P/N: G2R-1 24VDC, 继电器为消耗品, 若寿命用尽可用同规格继电器更换。
Omron relay P/N: G2R-1 24VDC, the relay is consumable, if the service life of the same specification relay replacement.

- 使用前请确认输出触点容量, 请勿超出其范围。
- Please confirm the output contact capacity before use, do not exceed its scope.

接线方式 Wiring Method

- 通过端子台一对一接线输入控制信号。
- 控制信号为NPN时(低信号输入), COM端接24V。
- 控制信号为PNP时(高信号输入), COM端接0V。
- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.

超小型继电器模组 Subminiature Relay Module

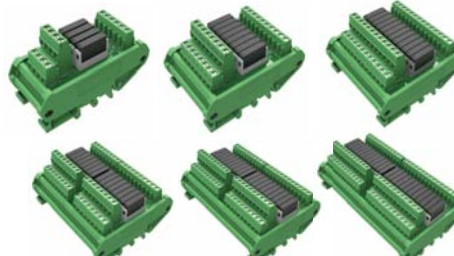DM72-RMUS-04-PN-1-44-00A(H) DM72-RMUS-08-PN-1-44-00A(H)
DM72-RMUS-12-PN-1-44-00A(H) DM72-RMUS-16-PN-1-44-00A(H)
DM72-RMUS-20-PN-1-44-00A(H) DM72-RMUS-24-PN-1-44-00A(H)


特点

- 本模组提供4、8、12、16、20、24位独立继电器回路。
- 适用于NPN，PNP型控制器。
- 继电器采用1N/O节点，输出端一对一输出。
- 节省配线空间，时间和成本。
- 方便查修和维护。

Features


- Including 4, 8, 12, 16, 20, 24 bit independent relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1N/O node and 1 to 1 output of the output end.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



型号 P/N	长L * 宽W * 高H mm
DM72-RMUS-04-PN-1-44-00A(H)	40 * 90 * 60
DM72-RMUS-08-PN-1-44-00A(H)	60 * 90 * 60
DM72-RMUS-12-PN-1-44-00A(H)	80 * 90 * 60
DM72-RMUS-16-PN-1-44-00A(H)	103 * 90 * 60
DM72-RMUS-20-PN-1-44-00A(H)	123 * 90 * 60
DM72-RMUS-24-PN-1-44-00A(H)	145 * 90 * 60

电路图 Circuit Diagram

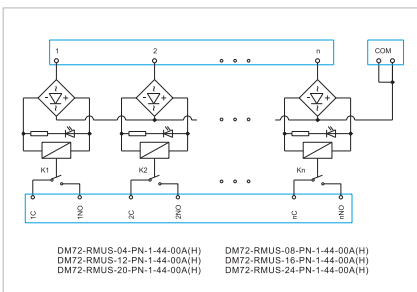

性能参数 Performance Parameters

耐电压 Withstand Voltage	500VAC 50Hz (1min)
绝缘阻抗 Insulation Resistance	1000MΩ/500VDC
线圈电压 Coil Voltage	24VDC
负载电压 Load Voltage	30VDC/240VAC
负载电流 Load Current	5A
负载类型 Load Type	1NO
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	TS-15 TS-32 TS-35

继电器型号 Relay P/N

松下继电器P/N: APAN3124, 继电器为消耗品, 若寿命用尽可用同规格继电器更换。
Panasonic relay P/N: APAN3124, the relay is consumable, if the service life of the same specification relay replacement.

- 使用前请确认输出触点容量, 请勿超出其范围。
- Please confirm the output contact capacity before use, do not exceed its scope.

接线方式 Wiring Method

- 通过端子台一对一接线输入控制信号。
- 控制信号为NPN时(低信号输入), COM端接24V。
- 控制信号为PNP时(高信号输入), COM端接0V。
- Input control signal through 1 to 1 wiring of terminal block.
- When the control signal is NPN (low signal input), connect COM to 24V.
- When the control signal is PNP (high signal input), connect COM to 0V.



DM72-RME-04-PN-1-4A-00A(H)
DM72-RME-08-PN-1-4A-00A(H)
DM72-RME-16-PN-1-4A-00A(H)


特点

- 本模组提供4、8、16位独立固态继电器回路。
- 适用于NPN、PNP型控制器。
- 继电器采用1N/O节点，输出端一对一输出。
- MOS管输出，无机械触点。
- 节省配线空间，时间和成本。
- 方便直修和维护。

Features


- Including 4, 8, 16 bit independent Solid State relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1N/O node and 1 to 1 output of the output end.
- MOS tube output, no mechanical contact.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



型号 P/N	长L * 宽W * 高H mm
DM72-RME-04-PN-1-4A-00A(H)	40 * 90 * 60
DM72-RME-08-PN-1-4A-00A(H)	62 * 90 * 60
DM72-RME-16-PN-1-4A-00A(H)	117 * 90 * 60

电路图 Circuit Diagram

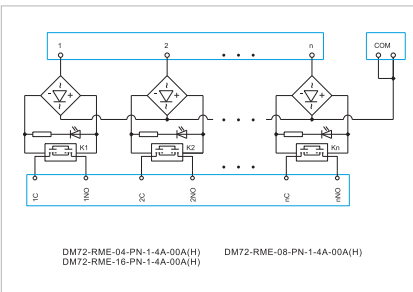

DM72-RME-04-PN-1-4D-00A(H)
DM72-RME-08-PN-1-4D-00A(H)
DM72-RME-16-PN-1-4D-00A(H)


特点

- 本模组提供4、8、16位独立固态继电器回路。
- 适用于NPN、PNP型控制器。
- 继电器采用1N/O节点，输出端一对一输出。
- MOS管输出，无机械触点，输出端交直流通用。
- 节省配线空间，时间和成本。
- 方便直修和维护。

Features


- Including 4, 8, 16 bit independent Solid State relay circuits.
- Applicable to NPN, PNP controller.
- The relay adopts 1N/O node and 1 to 1 output of the output end.
- MOS tube output, no mechanical contact, AC/DC Universal Output.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



型号 P/N	长L * 宽W * 高H mm
DM72-RME-04-PN-1-4D-00A(H)	40 * 90 * 60
DM72-RME-08-PN-1-4D-00A(H)	62 * 90 * 60
DM72-RME-16-PN-1-4D-00A(H)	117 * 90 * 60

电路图 Circuit Diagram

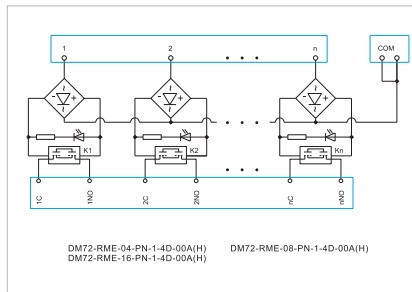


DM72-RMUS-16-PN-1-4M-00A(H)
DM72-RMUS-32-PN-1-4M-00A(H)


特点

- 本模组提供16、32位独立继电器回路。
- NPN, PNP通过跳线切换。
- 继电器采用1NO节点, 输出端一对一输出。
- 节省配线空间, 时间和成本。
- 方便检修和维护。


Features

- Including 16, 32 bit independent relay circuits.
- Switch NPN, PNP through jumper.
- The relay adopts 1NO node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions




DM72-RMUS-16-PN-1-4M-00A(H)

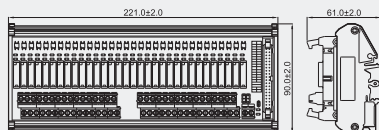

DM72-RMUS-32-PN-1-4M-00A(H)

电路图 Circuit Diagram

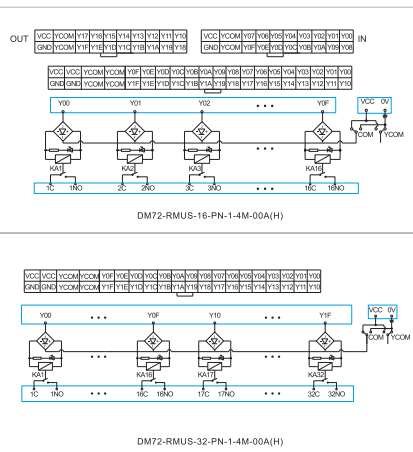

性能参数 Performance Parameters

耐电压 Withstand Voltage	500VAC 50Hz (1min)
绝缘阻抗 Insulation Resistance	1000MΩ / 500VDC
线圈电压 Coil Voltage	24VDC
负载电压 Load Voltage	30VDC/240VAC
负载电流 Load Current	5A
负载类型 Load Type	1NO
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	TS-15 TS-32 TS-35
继电器品牌和型号 Relay Brand and Type	Panasonic APAN3124

适用PLC Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT FX2NC-16MT/32MT/64MT/96MT FX3UC-16MT/32MT/64MT/96MT	QY41P/QY42P QY71P/QH42P LY41NT1P/LY42NT1P
--------------------	---	---

关联产品 Related Products

DX210-2 DX210-4

接线方式 Wiring Method

- 在断电情况下, 将0V接至端子台“0V”, 将24V接至端子台“VCC”。
- 40P排线插入40芯连接器或20P排线插入20P*1N处。
- 控制信号的两种连接方式任选一种, 请勿重复接线。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3、B3、A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal “0V” and 24V to the terminal “VCC”.
- 40P row insert 40 core connector or insert 20P row wires 20P*1N”.
- Choose one from two kinds of control signal connection methods, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

- 在断电情况下, 将0V接至端子台“0V”, 将24V接至端子台“VCC”。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3、B3、A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal “0V” and 24V to the terminal “VCC”.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.


DM72-RMS-08-PN-1-4M-00A(H)
DM108-RMS-16-PN-1-4M-00A(H)
DM108-RMS-32-PN-1-4M-00A(H)


特点

- 本模组提供8、16、32位独立继电器回路。
- NPN, PNP通过跳线切换。
- 继电器采用1N/O节点, 输出端一对一输出。
- 节省配线空间, 时间和成本。
- 方便检修和维护。

Features


- Including 8, 16, 32 bit independent relay circuits.
- Switch NPN, PNP through jumper.
- The relay adopts 1N/O node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions




DM72-RMS-08-PN-1-4M-00A(H)

DM108-RMS-16-PN-1-4M-00A(H)



DM108-RMS-32-PN-1-4M-00A(H)

电路图 Circuit Diagram

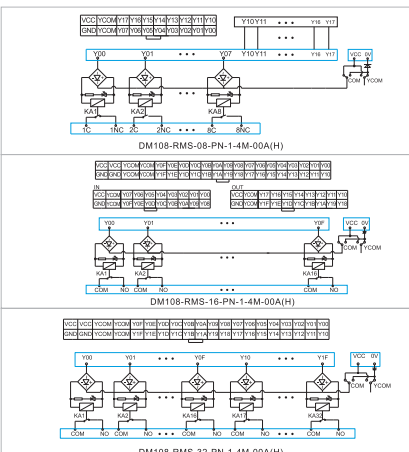

性能参数 Performance Parameters

耐电压 Withstand Voltage	500VAC 50Hz (1min)
绝缘阻抗 Insulation Resistance	1000MΩ / 500VDC
线圈电压 Coil Voltage	24VDC
负载电压 Load Voltage	30VDC/240VAC
负载电流 Load Current	10A
负载类型 Load Type	1NO
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	TS-15 TS-32 TS-35
继电器品牌和型号 Relay Brand and Type	TE OJE-SS-124HM

适用PLC Suitable PLC


MITSUBISHI Qseries	FX1NC-16MT/32MT FX2NC-16MT/32MT/64MT/96MT FX3UC-16MT/32MT/64MT/96MT	QY41P/QY42P QY71P/QH42P LY41NT1P/LY42NT1P
--------------------	---	---

关联产品 Related Products

DX210-2 DX210-4

接线方式 Wiring Method

- 在断电情况下, 将0V接至端子台“0V”, 将24V接至端子台“VCC”。
- 20P排线插入20芯连接器。
- 控制信号的两种连接方式任选一种, 请勿重复接线。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A2、B2的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal “0V” and 24V to the terminal “VCC”.
- 20P row wires inserted into 20 core connectors.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B2. Users can make short connection according to their own requirements.
- 在断电情况下, 将0V接至端子台“0V”, 将24V接至端子台“VCC”。
- 40P排线插入40芯连接器或20P排线插入20P*1N处。
- 控制信号的两种连接方式任选一种, 请勿重复接线。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3、B3、A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal “0V” and 24V to the terminal “VCC”.
- 40P row insert 40 core connector or insert 20P row wires 20P*1N”.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.
- 在断电情况下, 将0V接至端子台“0V”, 将24V接至端子台“VCC”。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3、B3、A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal “0V” and 24V to the terminal “VCC”.
- 40P row insert 40 core connector or insert 20P row wires 20P*1N”.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

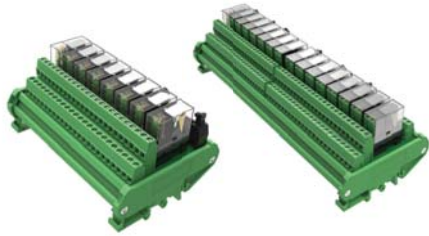

DM72-RM-08-PN-4-4M-01A(H)
DM72-RM-16-PN-4-4M-01A(H)


特点

- 本模组提供8、16位独立继电器回路。
- NPN, PNP通过跳线切换。
- 继电器采用2NO/2NC节点, 输出端一对一输出。
- 节省配线空间, 时间和成本。
- 方便检修和维护。


Features

- This module provides 8, 16 bit independent relay circuits.
- Switch NPN, PNP through jumper.
- The relay adopts 2NO/2NC node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

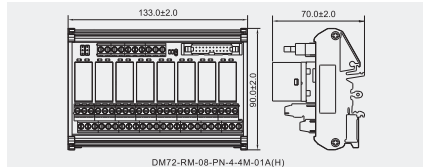


DM72-RM-08-PN-4-4M-01A(H)

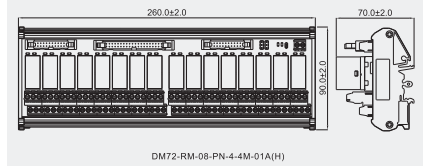


DM72-RM-16-PN-4-4M-01A(H)

电路图 Circuit Diagram

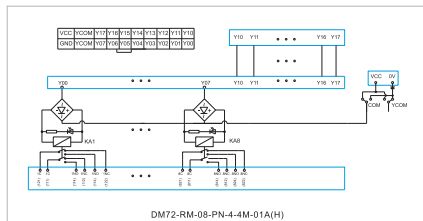

DM72-RM-08-PN-4-4M-01A(H)

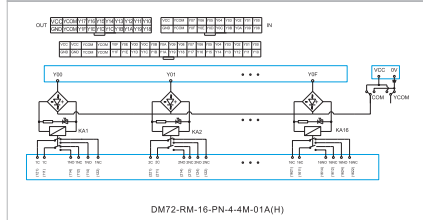

DM72-RM-16-PN-4-4M-01A(H)

性能参数 Performance Parameters

耐电压 Withstand Voltage	500VAC 50Hz (1min)
绝缘阻抗 Insulation Resistance	1000MΩ/500VDC
线圈电压 Coil Voltage	24VDC
负载电压 Load Voltage	30VDC/240VAC
负载电流 Load Current	5A
负载类型 Load Type	2NO/2NC
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	TS-15 TS-32 TS-35
继电器品牌和型号 Relay Brand and Type	OMRON G2R-2

适用PLC Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT FX2NC-16MT/32MT/64MT/96MT FX3UC-16MT/32MT/64MT/96MT	QY41P/QY42P QY71P/QH42P LY41NT1P/LY42NT1P
--------------------	---	---

关联产品 Related Products

DX210-2 DX210-4

接线方式 Wiring Method

- 在新电情况下, 将0V接至端子台"0V", 将24V接至端子台"VCC".
- 20P排线插入20芯连接器处。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A2, B2的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 20P row wires inserted into 20 core connectors.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B2. Users can make short connection according to their own requirements.

- 在新电情况下, 将0V接至端子台"0V", 将24V接至端子台"VCC".
- 40P排线插入40芯连接器处或20P排线插入20P "IN"处。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3, B3, A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 40P row insert 40 core connector or insert 20P row wires 20P "IN".
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.



DM108-RM-08-PN-2-4M-01A(H)
DM108-RM-16-PN-2-4M-01A(H)
DM108-RM-32-PN-2-4M-01A(H)


特点

- 本模组提供8、16、32位独立继电器回路。
- NPN, PNP通过跳线切换。
- 继电器采用1NO/1NC节点, 输出端一对一输出。
- 节省配线空间, 时间和成本。
- 方便检修和维护。


Features

- This module provides 8, 16, 32 bit independent relay circuits.
- Switch NPN, PNP through jumper.
- The relay adopts 1NO/1NC node, and the output terminal outputs one to one.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

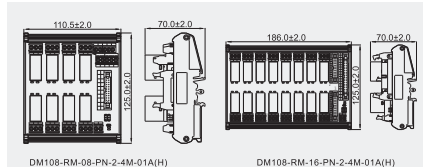


DM108-RM-08-PN-2-4M-01A(H)

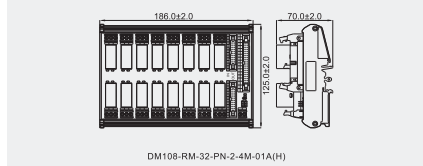


DM108-RM-32-PN-2-4M-01A(H)


电路图 Circuit Diagram

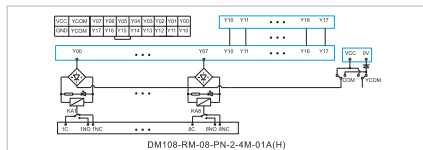

DM108-RM-08-PN-2-4M-01A(H)

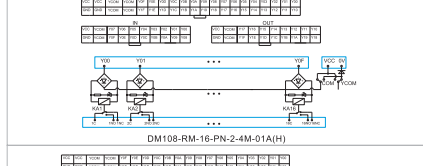

DM108-RM-16-PN-2-4M-01A(H)

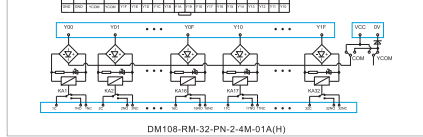

DM108-RM-32-PN-2-4M-01A(H)

性能参数 Performance Parameters

耐电压 Withstand Voltage	500VAC 50Hz (1min)
绝缘阻抗 Insulation Resistance	1000MΩ/500VDC
线圈电压 Coil Voltage	24VDC
负载电压 Load Voltage	30VDC/240VAC
负载电流 Load Current	16A
负载类型 Load Type	1NO + 1NC
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	TS-15 TS-32 TS-35
继电器品牌和型号 Relay Brand and Type	OMRON G2R-1E

适用PLC Suitable PLC

MITSUBISHI Qseries	FX1NC-16MT/32MT FX2NC-16MT/32MT/64MT/96MT FX3UC-16MT/32MT/64MT/96MT	QY41P/QY42P QY71P/QH42P LY41NT1P/LY42NT1P
--------------------	---	---

关联产品 Related Products

DX210-2 DX210-4

接线方式 Wiring Method

- 在新电情况下, 将0V接至端子台"0V", 将24V接至端子台"VCC".
- 20P排线插入20芯连接器处。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A2, B2的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 20P row wires inserted into 20 core connectors.
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B2. Users can make short connection according to their own requirements.

- 在新电情况下, 将0V接至端子台"0V", 将24V接至端子台"VCC".
- 40P排线插入40芯连接器处或20P排线插入20P "IN"处。
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3, B3, A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- 40P row insert 40 core connector or insert 20P row wires 20P "IN".
- Control signal of two kinds of connection, do not repeat wiring.
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

- 在新电情况下, 将0V接至端子台"0V", 将24V接至端子台"VCC".
- 控制信号为NPN时, 将COM与VCC短接。
- 控制信号为PNP时, 将COM与0V短接。
- YCOM用于控制A3, B3, A4和B4的电压, 用户可以根据自己的需求短接。
- Make sure to power off first, connect 0V to the terminal "0V" and 24V to the terminal "VCC".
- When the control signal is NPN, short-circuit COM and VCC.
- When the control signal is PNP, short-circuit COM and 0V.
- YCOM is used to control the voltage of A3, B3, A4 and B4. Users can make short connection according to their own requirements.

10位IDC接口模组 10P IDC Interface Module

CE RoHS



DM72-IDC-10-10-4Y-00A(H)
DM50-IDC-10-10-4Y-00A(H)


特点

- 本模组为10P IDC连接器——对应10P端子台。
- 可以用于连接所有带10P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便检修和维护。


Features

- This module is 10P IDC connector corresponding to 10P terminal blocks.
- Can be used to connect all with 10P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions




DM72-IDC-10-10-4Y-00A(H)



DM50-IDC-10-10-4Y-00A(H)

电路图 Circuit Diagram

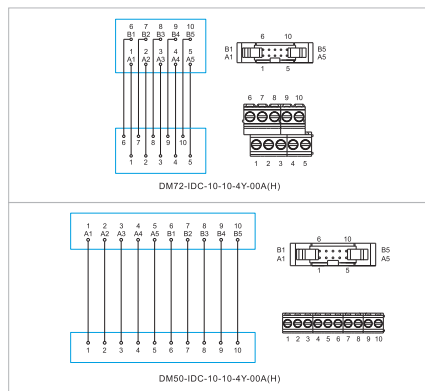

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

KEYENCE	KV-B16XA/XC KV series of small PLC
Panasonic FP0, FP2 series	FP0-C16T/C16CT(IN Ministry) FP0-C16P/C16CP(IN Ministry) FP0-C32T/C32CT/T32CT(IN Ministry) FP0-C32P/C32CP/T32CP(IN Ministry) FP0-E16T/P(IN Ministry) FP0-E32T/P(IN Ministry) FP0-E8X FP0-E16X FP2-C28(IN Ministry) FP2-C32(IN Ministry) FP0-C16T/C16CT(OUT Ministry) FP0-C16P/C16CP(OUT Ministry) FP0-C32T/C32CT/T32CT(OUT Ministry) FP0-C32P/C32CP/T32CP(OUT Ministry) FP0-E16T/P(OUT Ministry) FP0-E32T/P(OUT Ministry) FP0-E8YT FP0-E16YT FP2-C28(OUT Ministry) FP2-C32(OUT Ministry)

关联产品 Related Products

DX216-1 DX216-2 DX216-3 DX200-1 DX210-1

20位IDC接口模组 20P IDC Interface Module

CE RoHS



DM72-IDC-20-20-4Y-00A(H)
DM50-IDC-20-20-4Y-00A(H)


特点

- 本模组为20P IDC连接器——对应20P端子台。
- 可以用于连接所有带20P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便检修和维护。


Features

- This module is 20P IDC connector corresponding to 20P terminal blocks.
- Can be used to connect all with 20P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions




DM72-IDC-20-20-4Y-00A(H)



DM50-IDC-20-20-4Y-00A(H)

电路图 Circuit Diagram

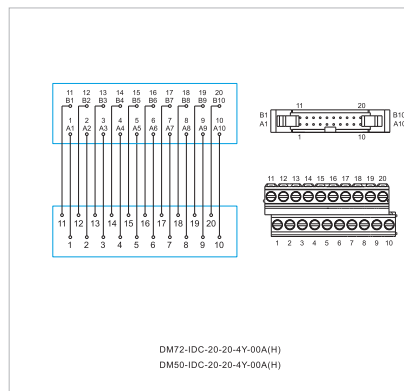

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

OMRON	CJ1W-MD232 CJ1W-MD233
MITSUBISHI Fseries	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM

关联产品 Related Products

DX200-2 DX210-2 DX218-1 DX220-3 DX218-9

26位IDC接口模组 26P IDC Interface Module

CE RoHS



DM72-IDC-26-26-4Y-00A(H)
DM50-IDC-26-26-4Y-00A(H)


特点

- 本模组为26P IDC连接器——对应26P端子台。
- 可以用于连接所有带26P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- This module is 26P IDC connector corresponding to 26P terminal blocks.
- Can be used to connect all with 26P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

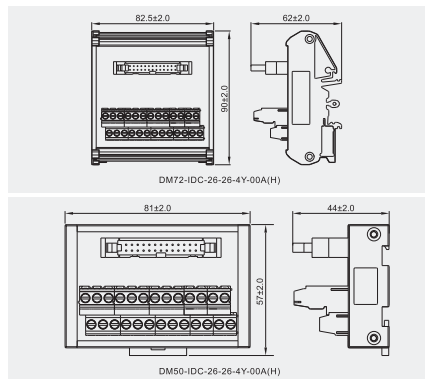

电路图 Circuit Diagram

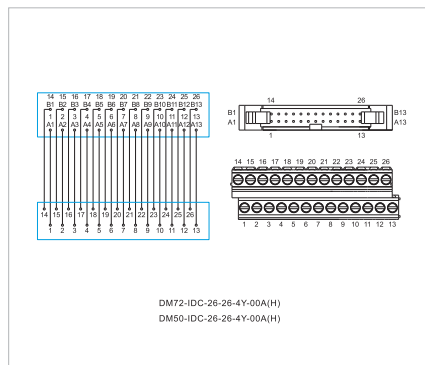

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘电阻 Insulation Resistance	500M Ω / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

KEYENCE	KL-16CX KL-16CT KL-32CX KL-32CT
---------	--

关联产品 Related Products

DX200-26 DX210-6 DX220-2

34位IDC接口模组 34P IDC Interface Module

CE RoHS



DM72-IDC-34-34-4Y-00A(H)
DM50-IDC-34-34-4Y-00A(H)


特点

- 本模组为34P IDC连接器——对应34P端子台。
- 可以用于连接所有带34P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- This module is 34P IDC connector corresponding to 34P terminal blocks.
- Can be used to connect all with 34P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

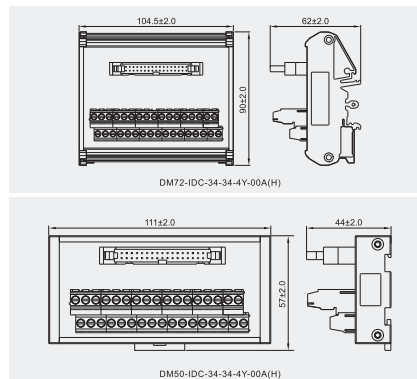

电路图 Circuit Diagram

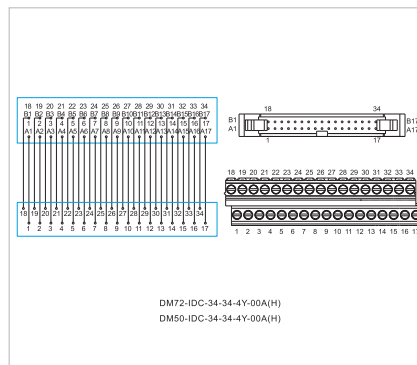

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘电阻 Insulation Resistance	500M Ω / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70°C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

KEYENCE	KL- C32XA/C KL- C64XA/C KL- C32TA/C KL- C64TA/C
---------	--

关联产品 Related Products

DX200-3 DX210-3

40位IDC接口模组 40P IDC Interface Module

CE RoHS



DM72-IDC-40-40-4Y-00A(H)
DM50-IDC-40-40-4Y-10A(H)


特点

- 本模组为40P IDC连接器——对应40P端子台。
- 可以用于连接所有带40P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- This module is 40P IDC connector corresponding to 40P terminal blocks.
- Can be used to connect all with 40P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

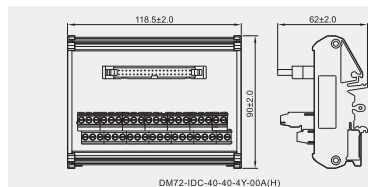


DM72-IDC-40-40-4Y-00A(H)

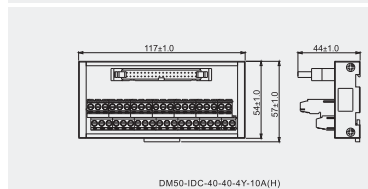

DM50-IDC-40-40-4Y-10A(H)

电路图 Circuit Diagram

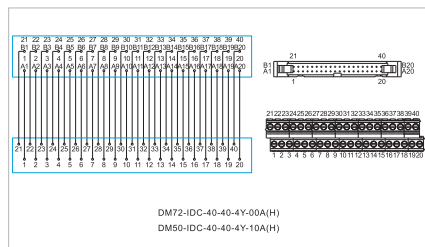

DM72-IDC-40-40-4Y-00A(H)
DM50-IDC-40-40-4Y-10A(H)

关联产品 Related Products

DX217-1 DX217-2 DX212-1 DX219-2 DX200-4
DX210-4 DX210-5

50位IDC接口模组 50P IDC Interface Module

CE RoHS



DM72-IDC-50-50-4Y-00A(H)
DM50-IDC-50-50-4Y-00A(H)


特点

- 本模组为50P IDC连接器——对应50P端子台。
- 可以用于连接所有带50P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- This module is 50P IDC connector corresponding to 50P terminal blocks.
- Can be used to connect all with 50P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

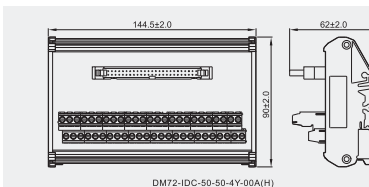


DM72-IDC-50-50-4Y-00A(H)

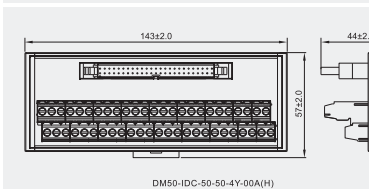

DM50-IDC-50-50-4Y-00A(H)

电路图 Circuit Diagram

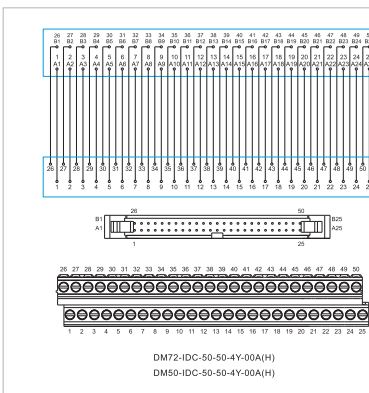

DM72-IDC-50-50-4Y-00A(H)
DM50-IDC-50-50-4Y-00A(H)

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

--	--

关联产品 Related Products

--	--

20位IDC接口模组 20P IDC Interface Module

CE RoHS



DM50-IDC-20-20-4G-00A(H)


特点

- 本模组为20P IDC连接器——对应20P栅栏端子。
- 可以用于连接所有带20P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。

Features


- This module is 20P IDC connector corresponding to 20P barrier terminal blocks.
- Can be used to connect all with 20P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions



DM50-IDC-20-20-4G-00A(H)

电路图 Circuit Diagram

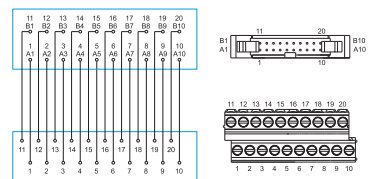

DM50-IDC-20-20-4G-00A(H)

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘电阻 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	4.43Lb-In
使用线径 Wire Range	22-14AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

OMRON	CJ1W-MD232 CJ1W-MD233
MITSUBISHI Fseries	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM

关联产品 Related Products

DX200-2 DX210-2 DX218-1 DX220-3 DX218-9

40位IDC接口模组 40P IDC Interface Module

CE RoHS



DM50-IDC-40-40-4G-00A(H)


特点

- 本模组为40P IDC连接器——对应40P栅栏端子。
- 可以用于连接所有带40P IDC连接器的PLC或控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。

Features


- This module is 40P IDC connector corresponding to 40P barrier terminal blocks.
- Can be used to connect all with 40P IDC connector PLC or controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

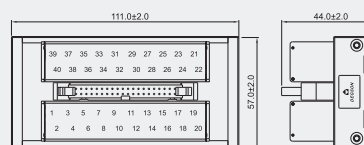

DM50-IDC-40-40-4G-00A(H)

电路图 Circuit Diagram

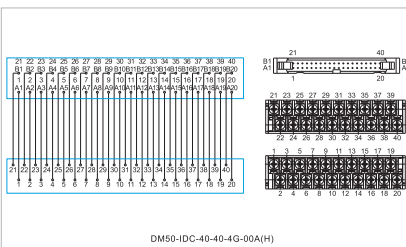

DM50-IDC-40-40-4G-00A(H)

关联产品 Related Products

DX217-1 DX217-2 DX212-1 DX219-2 DX200-4
DX210-4 DX210-5

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘电阻 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	4.43Lb-In
使用线径 Wire Range	22-14AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC

KEYENCE	KV-1000 / KV-3000 / KV-5000 KV-H20S / KV-H40S
OMRON	CJ1W-ID231 / CJ1W-ID261 CJ1W-ID281 (N terminal) CJ1W-ID232 / CJ1W-ID262 CJ1W-MD263 (N terminal) CJ1W-MD563 (N terminal) CJ1W-OD231 / CJ1W-OD261 CJ1W-MD281 (OUT terminal) CJ1W-OD232 / CJ1W-OD233 CJ1W-OD262 / CJ1W-OD263 CJ1W-MD263 (OUT terminal) CJ1W-MD563 (OUT terminal) CJ1M-CPU21 CJ1M-CPU22 CJ1M-CPU23
MITSUBISHI Qseries	Qx41 Qx41-S1 Qx42 Qx42-S1 Qx71 Qx72 QY41P QY42P Qy71 QH42P QD70P QD70P QD70 QD75M
Panasonic FP0 FPΣ FP2 series	FP2-X64D2T/P FP2-C1D FP2-X32D FP2-X64D2 FP2-32T/P FP2-V64T/P FP2-X64D2T/X64D7T FP2-X64D2P/X64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT
SIEMENS	40P Plug with a full range
Yokogawa PLCFA-M3 series	F3WD64-3N F3WD64-3F F3WD32-3F

20、26、36、50位MDR接口模组 20、26、36、50P MDR Interface Module

CE RoHS



DM50-MDR-20-20-4Y-00A(H) DM50-MDR-26-26-4Y-00A(H)
DM50-MDR-36-36-4Y-00A(H) DM50-MDR-50-50-4Y-00A(H)


特点

- 本产品分为20、26、36、50位 MDR分线器模组。
- 可直接应用于三菱、安川、松下、台达、三洋、AB 等伺服驱动器的信号接口。
- 无需焊线，只需一对一管脚接线即可。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- Including 20P, 26P, 36P, 50P MDR Interface module.
- Can be directly used in Mitsubishi, Yaskawa, Panasonic, Delta, Sanyo, AB servo driver signal interface.
- No need for welding wire, just one to one pin wiring.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

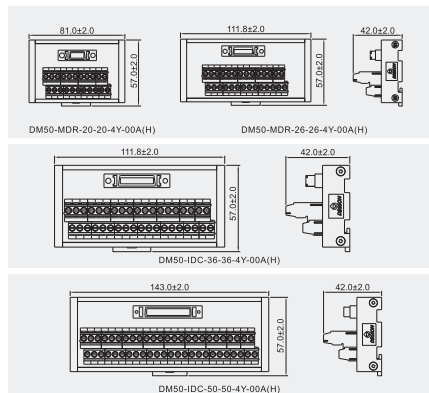

电路图 Circuit Diagram

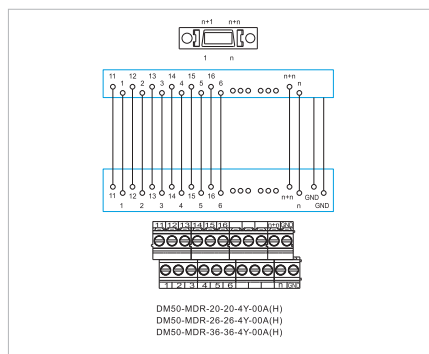

DM50-MDR-20-20-4Y-00A(H)
DM50-MDR-26-26-4Y-00A(H)
DM50-MDR-36-36-4Y-00A(H)

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN


适用 Suitable

PANASONIC DELTA KEYENCE SANYO YASKAWA AB FUJI MITSUBISHI

关联产品 Related Products

DX220-1 DX220-2 DX220-3

电路图 Circuit Diagram

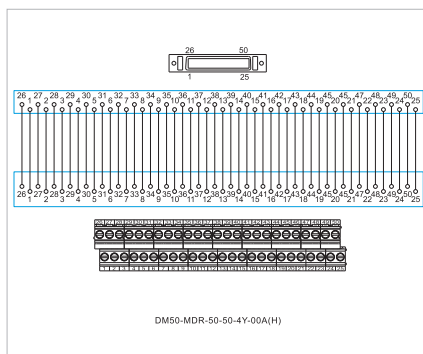

DM50-MDR-50-50-4Y-00A(H)

40位FCN接口模组 40P FCN Interface Module

CE RoHS



DM50-FCN-40-40-4Y-00A(H)


特点

- 本模组为40P FCN接口模组。
- 可以用于连接各种品牌伺服或PLC控制器。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- This module is 40P FCN Interface module.
- Can be used to connect various brands of servo or PLC controller.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

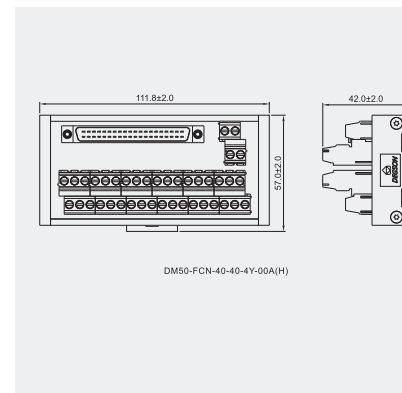

电路图 Circuit Diagram

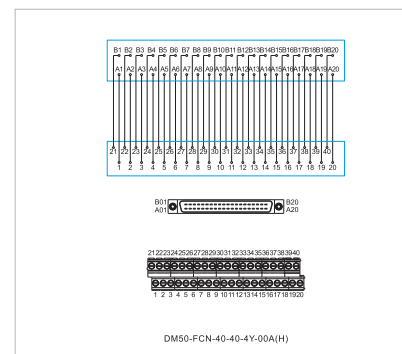

DM50-FCN-40-40-4Y-00A(H)


性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

适用PLC Suitable PLC



关联产品 Related Products



小型D-SUB母头接口模组 Small D-SUB Female Interface Module




DM50-DBJ-09-09-4Y-00A(H) DM50-DBJ-15-15-4Y-00A(H)
DM50-DBJ-25-25-4Y-00A(H) DM50-DBJ-37-37-4Y-00A(H)
DM50-DBJ-50-50-4Y-00A(H)


特点

- 本产品为9芯、15芯、25芯、37芯、50芯D-SUB母头接口模组。
- 可以连接各种伺服驱动器、运动控制卡、触摸屏、数控系统等。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB female splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

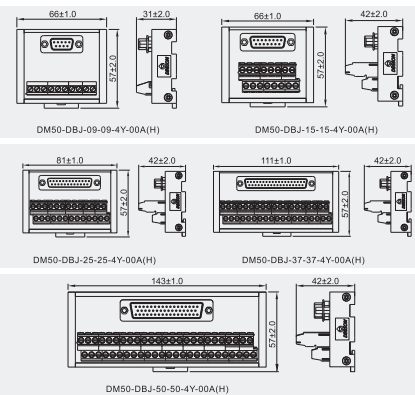


电路图 Circuit Diagram

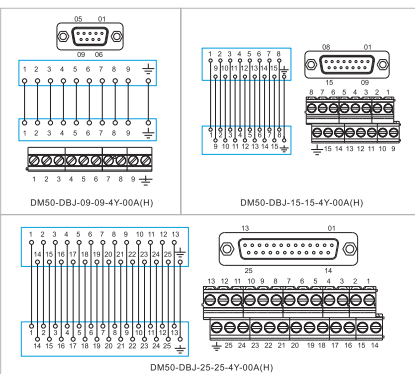

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500M Ω / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20 $\rightarrow$ +70 $^{\circ}$ C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

电路图 Circuit Diagram

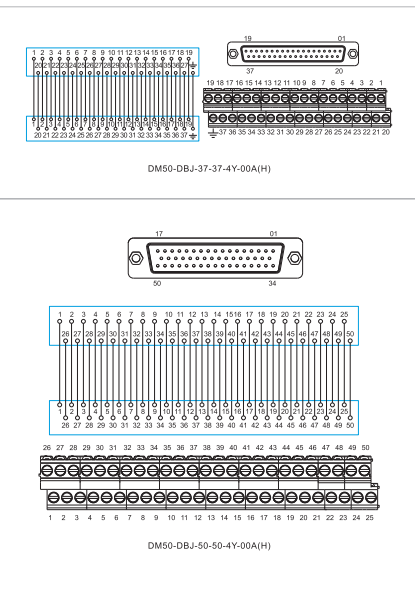

小型D-SUB公头接口模组 Small D-SUB Male Interface Module




DM50-DBK-09-09-4Y-00A(H) DM50-DBK-15-15-4Y-00A(H)
DM50-DBK-25-25-4Y-00A(H) DM50-DBK-37-37-4Y-00A(H)
DM50-DBK-50-50-4Y-00A(H)


特点

- 本产品为9芯、15芯、25芯、37芯、50芯D-SUB公头接口模组。
- 可以连接各种伺服驱动器、运动控制卡、触摸屏、数控系统等。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB male splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

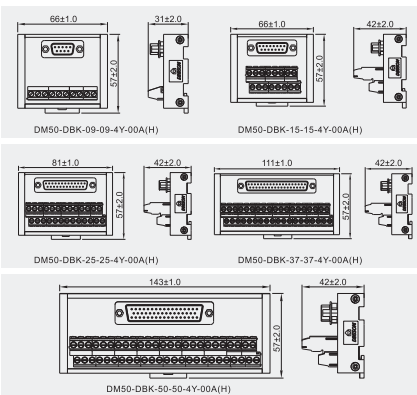


电路图 Circuit Diagram

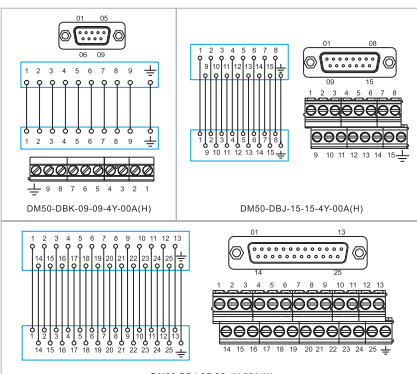

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500M Ω / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20 $\rightarrow$ +70 $^{\circ}$ C
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

电路图 Circuit Diagram

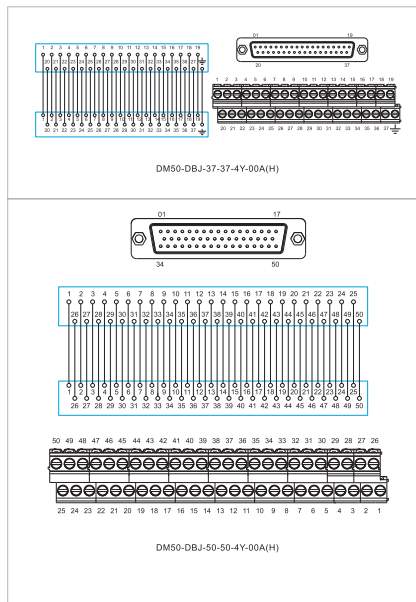

D-SUB母头接口模组 D-SUB Female Interface Module




DM72-DBJ-09-09-4Y-00A(H) DM72-DBJ-15-15-4Y-00A(H)
DM72-DBJ-25-25-4Y-00A(H) DM72-DBJ-37-37-4Y-00A(H)
DM72-DBJ-50-50-4Y-00A(H)


特点

- 本产品为9芯、15芯、25芯、37芯、50芯D-SUB母头接口模组。
- 可以连接各种伺服驱动器、运动控制卡、触摸屏、数控系统等。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB female splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

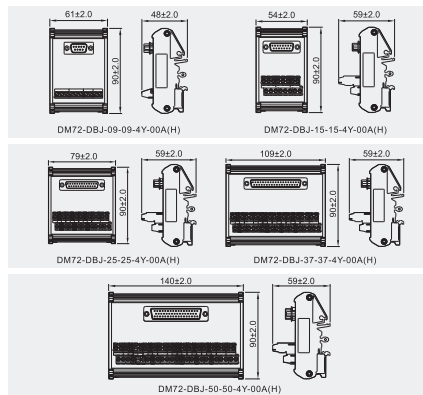


电路图 Circuit Diagram

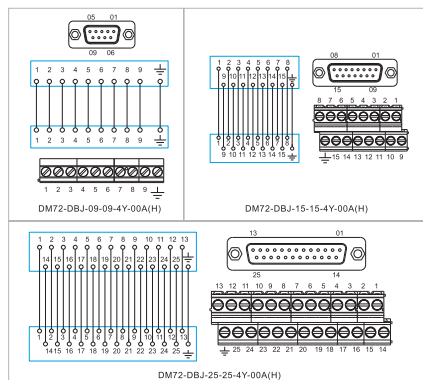

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

电路图 Circuit Diagram

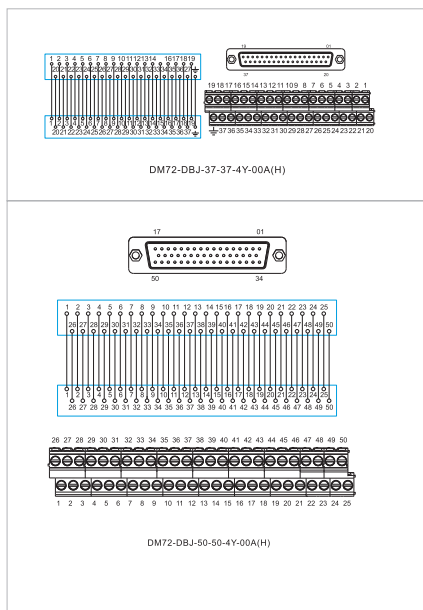

D-SUB公头接口模组 D-SUB Male Interface Module




DM72-DBK-09-09-4Y-00A(H) DM72-DBK-15-15-4Y-00A(H)
DM72-DBK-25-25-4Y-00A(H) DM72-DBK-37-37-4Y-00A(H)
DM72-DBK-50-50-4Y-00A(H)


特点

- 本产品为9芯、15芯、25芯、37芯、50芯D-SUB公头接口模组。
- 可以连接各种伺服驱动器、运动控制卡、触摸屏、数控系统等。
- 节省配线空间，时间和成本。
- 方便查修和维护。


Features

- Including 9P, 15P, 25P, 37P, 50P D-SUB male splitter.
- Can be connected to a variety of servo drivers, motion control CARDS, touch screens, CNC systems etc.
- Save wiring space, time and cost.
- Convenient for repair and maintenance.

外形图 Dimensions

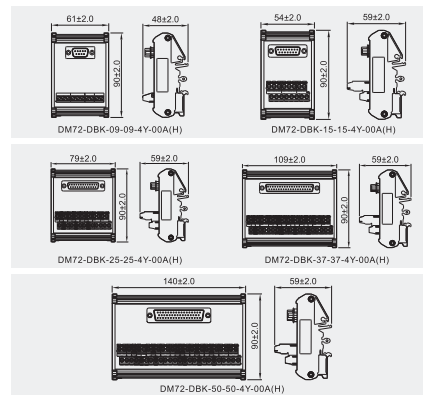

电路图 Circuit Diagram

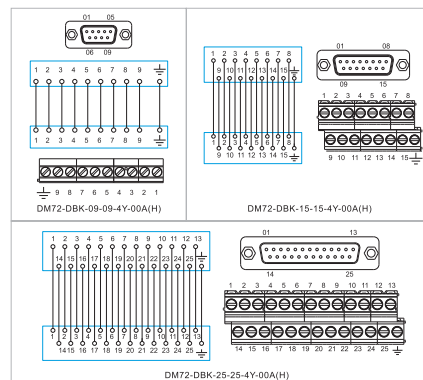

性能参数 Performance Parameters

额定电流/电压 Rated Current/Voltage	1A/125VAC
耐电压 Withstand Voltage	500VAC 1min
绝缘阻抗 Insulation Resistance	500MΩ / 500VDC
剥线长度 Stripping Length	7mm
工作环境温度 Ambient Temperature	-20~+70℃
最大扭矩 Maximum Torque	0.4Nm(3.54Lb-In)
使用线径 Wire Range	26-12AWG
安装方式 Mounting	35mm DIN

电路图 Circuit Diagram

