



213810
SBT-F-GYR-R50-3B-B5
Signal column



- Status display 360°
- Good signal effect thanks to state-of-the art, efficient LEDs
- Low energy consumption
- Immediately usable, direct predefined segment activation
- Simple installation (M30 threading)
- Assembly accessories optionally available
- Buzzer

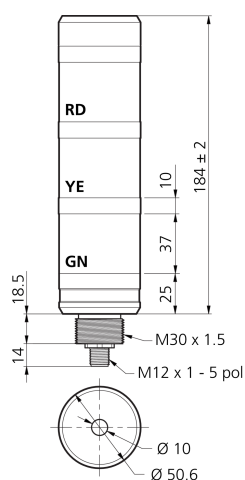

PIN	Signal	Connection cable wire color
1	Red LED	Brown
2	Buzzer	White
3	GND	Blue
4	Green LED	Black
5	Yellow LED	Grey

Function



Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	160 mA (24 V DC)
Power	3.8 W (24 V)
Inverse polarity protection	Yes
Illuminated area	50 x 37 mm (Ø x H / segment)
Number of segments	3
Housing material	Aluminum (natural, Anodized)
Material	Polycarbonate (Diffusor)
Weight	310 g
Protection class	III
Approvals	UL
Model	Signal column
Buzzer	With buzzer, 95 (dB(A) typ. @ 50 cm)
Color selection	Red, green, yellow
Number of inputs/outputs	4/0
Input level (high/low)	24V / 0V
Color	Red, green, yellow
Vibration load	10 ... 55 Hz / 0.35 mm
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 65
Connection	Connector, M12, 5-pin

213810
SBT-F-GYR-R50-3B-B5
Signal column



Technical data (typ.)	+20°C, 24 V DC
Connection cable	CO12.5-5
More information / accessories	https://www.velma-automation.com