

SINGLE PHASE FILTER Plastic Chassis

High Performance


Features

- Superior attenuation of common-mode noise
- 2-stage filter suitable for heavily noisy environment
- Current rating 1A~20A
- Integrated nut is in hinged cover for reliable ring lug wiring
- Light weight plastic housing design

Marketing Applications

- Metal processing equipment
- Automation
- Assembly lines
- Computer numberical control (CNC)
- Packaging machine


Electrical Schematic

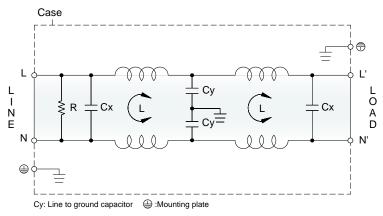

Special Features

CNBC series: best frequency bands 150kHz~1MHz.

Filter Attenuation Insertion loss (dB) in 50 ohm system CISPR 17 (for reference only)

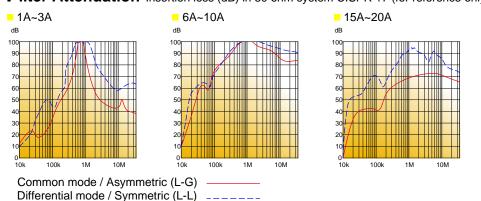














Technical Data and Measuring Conditions


No.	CNBC series Filter PRJ No.	01CNBC472	03CNBC472	06CNBC472	10CNBC472	15CNBC472	20CNBC472
1	Rated voltage	AC 1Ø 250V / DC250V					
2	Rated current	1A	3A	6A	10A	15A	20A
3	Test voltage	2,500 VAC					
		(Cutoff current: 20mA), 1 min. at room temperature and humidity					
4	Isolation resistance	500VDC 100M Ω min. at room temperature and humidity					
5	Leakage current	1mA @250VAC/60Hz (max.)					
6	Cy cap. value	0.047 ~ 0.47nF					
7	Voltage drop	1.0V max.					
8	Safety approval temp.	-25° ~ +100°					
9	Operating temperature	-40° ~ +100°					
10	Operating humidity	20 ~ 95%RH (Non condensing)					
11	Storage temp. / humidity	-40° ~ +100°; 20 ~ 95%RH (Non condensing)					
12	Vibration	10 ~ 55Hz, 19.6m/s ² (2G), 3 min. period, 1 hour each X,Y,Z axis					
13	Impact	196.1m/s² (20G), 11ms, once along X,Y,Z axis					
14	Safety approvals	UL1283, CSA C22.2 No.8 (C-UL), VDE0565 Teil3-1, IEC/EN60939					

Mechanical Drawing (unit: mm)

Chassis mounting



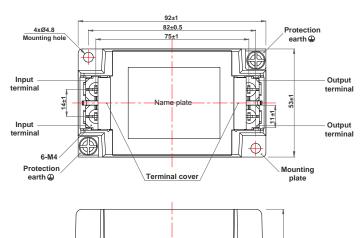



- ** Tolerance: ±1
 ** Case: PC
 ** Mounting plate: Iron
 (surface finishing: nickel plating) t= 1.2
 ** Terminal block screw tighting torque
 M4: 1.6N-m (16.9kgf-cm) max.

42±1